

# ▶ COOKER HOOD EXTRACT FAN




High performance,  
stainless steel cookerhood.

## BENEFITS

- High performance**  
 500m<sup>3</sup>/hr extraction capacity through tangential motor.
- Ease of use**  
 Simple push button control to generate speed and lighting.
- Easy clean**  
 Stainless steel 600mm cookerhood and integral grease filters.
- Optional Extra's**  
 2 x S1 carbon filters for air recirculation.
- 2 year warranty**

Pressure Drop 07 - COOKERHOOD SS with lights on

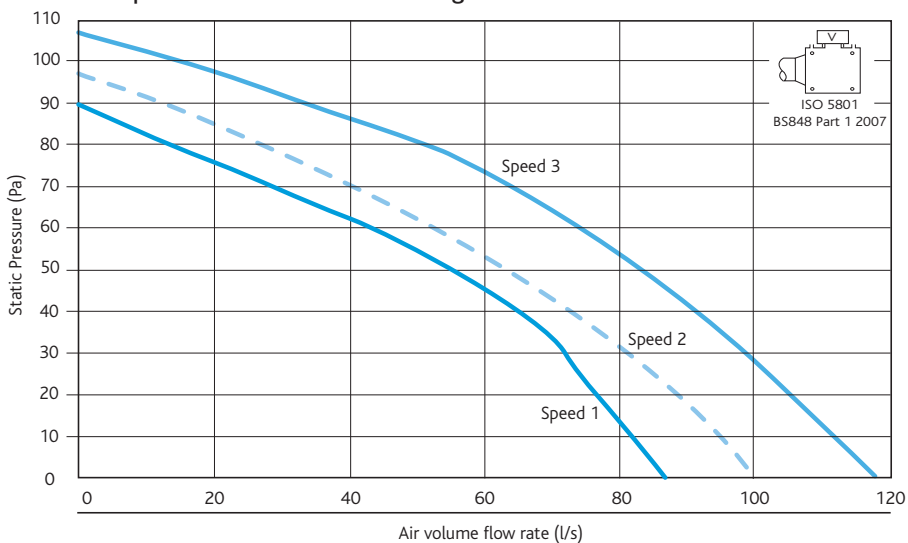

### Specifications

Casing shall be manufactured from easy to clean stainless steel.  
 The unit is fitted with two, washable metallic grease filters for quick and easy maintenance.  
 The hood must be fitted in accordance with

the manufacturers instruction and maintenance manual (available from [www.nuairegroup.com](http://www.nuairegroup.com)).

Note: the cooker hood will need to be sited a minimum of 650mm above the hob.

