

DRI-ECO-LC

The DRIMASTER-ECO range provides whole home ventilation using the Positive Input Ventilation principle, which introduces fresh filtered air into the dwelling at a continuous rate, encouraging movement of air from inside to outside.

The DRI-ECO-LC is our basic unit which provides all of the benefits of Positive Input Ventilation, offering system controls on the unit within the loft space. Whilst the controls offer variable options, when the DRIMASTER-ECO is installed the system should be set to a speed that is suitable to the property meaning access to the loft is only necessary for the cleaning/replacement of filters.



DRI-ECO-LC INSTALLATION

Technical

DIMENSIONS (mm) & UNIT WEIGHT
Weight - 3.5KG

341

820

338

DIFFUSER (mm)
Weight - 1KG

Ø 320

85

Wiring

The unit is supplied with a pre-wired power supply. This power supply unit has a metal bracket incorporating fixing holes, which should be used to fit the power supply to a suitable surface e.g. a wooden joist. The fan unit is also supplied with a fused spur.

The 2 core mains cable from the power supply should be connected to a fixed wiring installation in accordance with current IEE wiring regulations.


Electrical Details

	Voltage	Consumption
DRI-ECO-LC	230V 1ph 50Hz	1.6W(min) 17W(max)

Typical Installation


INSTALLATION OPTIONS

Roof structure

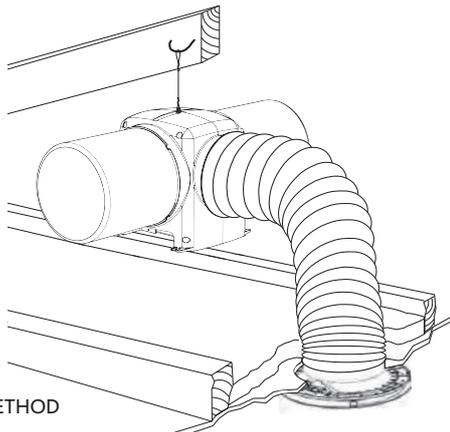

STANDARD METHOD OF FIXING

This method will take advantage of solar gain within the loft

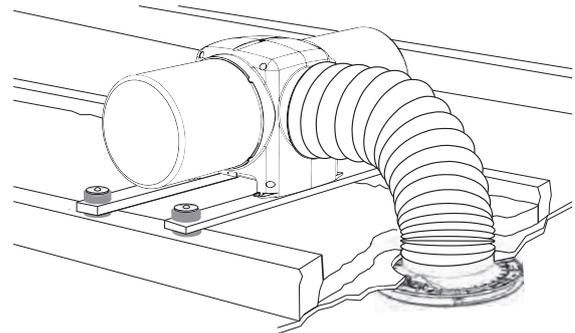

OPTIONAL METHOD OF FIXING.
(AV MOUNTING KIT ON TO ROOF JOISTS)

Part Code 771393

DRI-ECO-3STOREY


The DRI-ECO-3STOREY is the only unit within the DRIMASTER-ECO range which is suitable for install within three storey properties, by using an intumescent aluminium diffuser in order to meet fire regulation standards.

The unit itself works by drawing fresh air in from the loft space and dispersing it through the property via a powder coated ceiling diffuser, which provides a 1 hour fire-block. This technology is fundamental to the well-being of the home owner and allows Nuaire to offer a ventilation solution for every property type.





DRI-ECO-3STOREY INSTALLATION

Technical

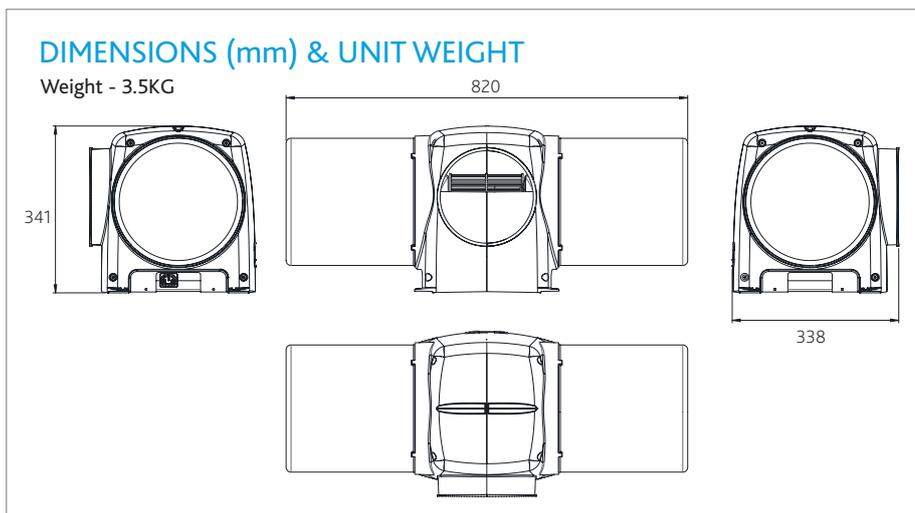

AIR DIFFUSER FOR THREE STOREY DWELLINGS

For use in stairwells of three storey properties, the optional powder-coated aluminium diffuser with 'fire-block' provides 1 hour of fire resistance in accordance with BS476 Part 20 and ISO834.

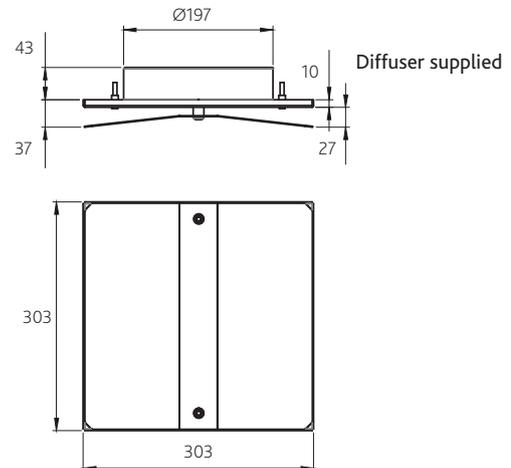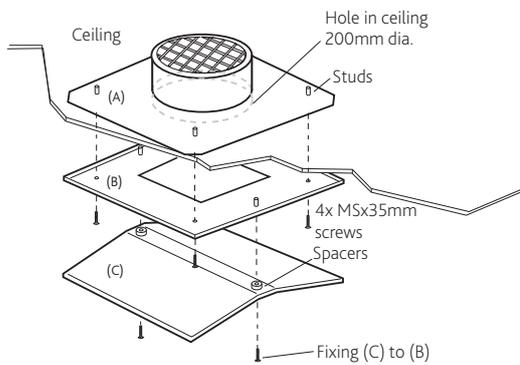

Wiring

The unit is supplied with a pre-wired power supply. This power supply unit has a metal bracket incorporating fixing holes, which should be used to fit the power supply to a suitable surface e.g. a wooden joist. The fan unit is also supplied with a fused spur.

The 2 core mains cable from the power supply should be connected to a fixed wiring installation in accordance with current IEE wiring regulations.


SMOKE / CARBON MONOXIDE ALARM AUTOMATIC SHUT DOWN

If the unit is required to switch off in the event of smoke/CO detection, alarms are available with separate relay bases from companies such as:

Kidde – www.kiddesafetyeurope.co.uk

Aico Ltd – www.aico.co.uk

Note: This is a mandatory requirement for all units installed in a 3 Storey property.

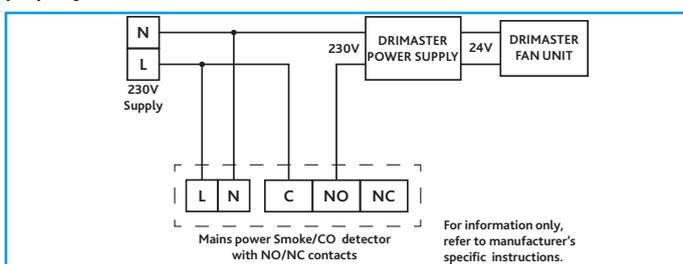

IMPORTANT

For good EMC engineering practice, the DRI-ECO-3STOREY power supply output cable and any sensor cables should not be placed within 50mm of other cables or each other.


Electrical Details

	Voltage	Consumption
DRI ECO-3STOREY	230V 1ph 50Hz	1.6W(min) 17W(max)

Typical Installation


INSTALLATION OPTIONS

Roof structure

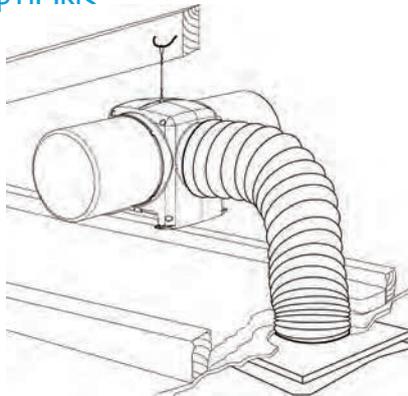

STANDARD METHOD
OF FIXING

This method will take advantage of solar gain within the loft

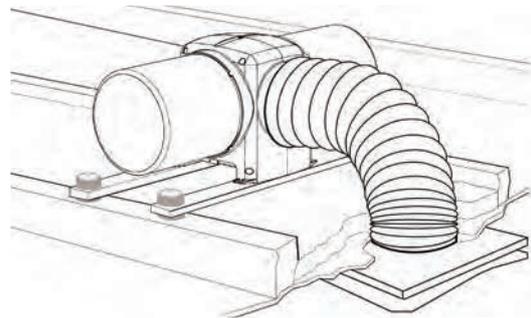

OPTIONAL METHOD OF FIXING.
(AV MOUNTING KIT ON TO ROOF JOISTS)

Part Code 771393

Consultants Specification

Low energy Positive Input Ventilation system for use in homes with a loft.

The unit shall be robustly constructed from ABS polymer.

Flame retardant filters of G4 grade, surface area approximately 0.47m² (with 5 year typical maintenance period) shall be fitted, which may be removed from the unit without the use of tools. The filters shall be arranged such as to prevent their obstruction in the loft space.

The unit shall incorporate a forward curved centrifugal impeller and high efficiency brushless DC motor fitted with sealed for life, self-lubricating bearings and locked rotor protection. The unit's average power consumption shall be 0.17 watts per l/s airflow.

The unit shall be supplied with a 2m length of flexible ducting and all necessary connectors and fittings.

The unit shall weigh 3.5kg and we recommend the unit is suspended from the roof structure. The unit shall be supplied with a purpose designed flame retardant polymer diffuser for efficient, directable air input. The diffuser design shall be optimised for use in areas where smoke detectors are fitted. The unit shall include 5 programmable temperature control strategies, 6 volume control settings and an optional high duty boost setting, providing an airflow rate of 70 l/s for optimum performance and occupant comfort. All control/duty strategies shall be optimised for maximum performance and occupant comfort.

An internal run motor shall record the unit's operational time. For information on reducing radon egress, it is suggested that the details given in Positive Pressurisation: A BRE Guide to Radon Remedial Measures in Existing Dwellings may be considered.

DRI-ECO-LC

The DRI-ECO-LC fan unit includes an internal sensor to regulate the fan speed according to the temperature of the loft. The internal sensor is to increase airflow to the dwelling when the loft reaches a temperature anywhere between 19-24 degrees celsius. The units 'Fixed Temperature Heat Recovery' strategy shall be achieved via a sensor located in the unit and shall improve energy performance accordingly.

The unit shall be offered with a 5 year warranty; 1 year parts and labour, remaining years parts only. This warranty is void if the equipment is modified without authorisation, is incorrectly applied, misused, disassembled or not installed, commissioned and maintained in accordance with the details contained in the I&M manual and general good practice.

DRI-ECO-3STOREY

The DRI-ECO-3STOREY fan unit includes an internal sensor to regulate the fan speed according to the temperature of the loft. The internal sensor is to increase airflow to the dwelling when the loft reaches a temperature anywhere between 19-24 degrees celsius. The units 'Fixed Temperature Heat Recovery' strategy shall be achieved via a sensor located in the unit and shall improve energy performance accordingly. The aluminium ceiling vent supplied includes an intumescent closure element.

The unit shall be offered with a 5 year warranty; 1 year parts and labour, remaining years parts only. This warranty is void if the equipment is modified without authorisation, is incorrectly applied, misused, disassembled or not installed, commissioned and maintained in accordance with the details contained in the I&M manual and general good practice.